



DITCH WITCH COMPACT UTILITY

ATTACHMENTS



MORE THAN A MACHINE. OR A TOOL. OR A TRENCHER. **DITCH WITCH.**

DITCH WITCH COMPACT UTILITY ATTACHMENTS

More than 100 different interchangeable attachments fit Ditch Witch® mini skid steers, mini excavators, and excavator-tool carriers. Strap on a power box rake and prepare seedbeds. Attach a backhoe and dig a koi pond. Stick on an auger and plant a row of trees. Whatever you do, you can find a Ditch Witch compact utility attachment to make the job easier.



KEY FEATURES

Comprehensive selection of attachments enables Ditch Witch compact utility equipment to perform virtually any type of underground or above ground task.

Attachments are easy to operate with each machine’s convenient, multi-function joysticks.

DETAILS

Quick-connect attachment plate on mini skid steers and excavators-tool carriers minimizes the effort in transforming each compact utility machine from a plow to a trencher, a tiller, an auger, or almost anything else.


The Ditch Witch organization supports all of its products with superior-quality parts, service and training, all available from a worldwide network of Ditch Witch dealers.

COMPACT UTILITY ATTACHMENTS

- Mini Skid Steers
- Mini Excavators
- XT850
- XT1600

- ## COMPACT UTILITY ATTACHMENTS
- Mini Skid Steers
 - Mini Excavators
 - XT850
 - XT1600

Hydraulic Auger Driver (High Speed, Low Torque)

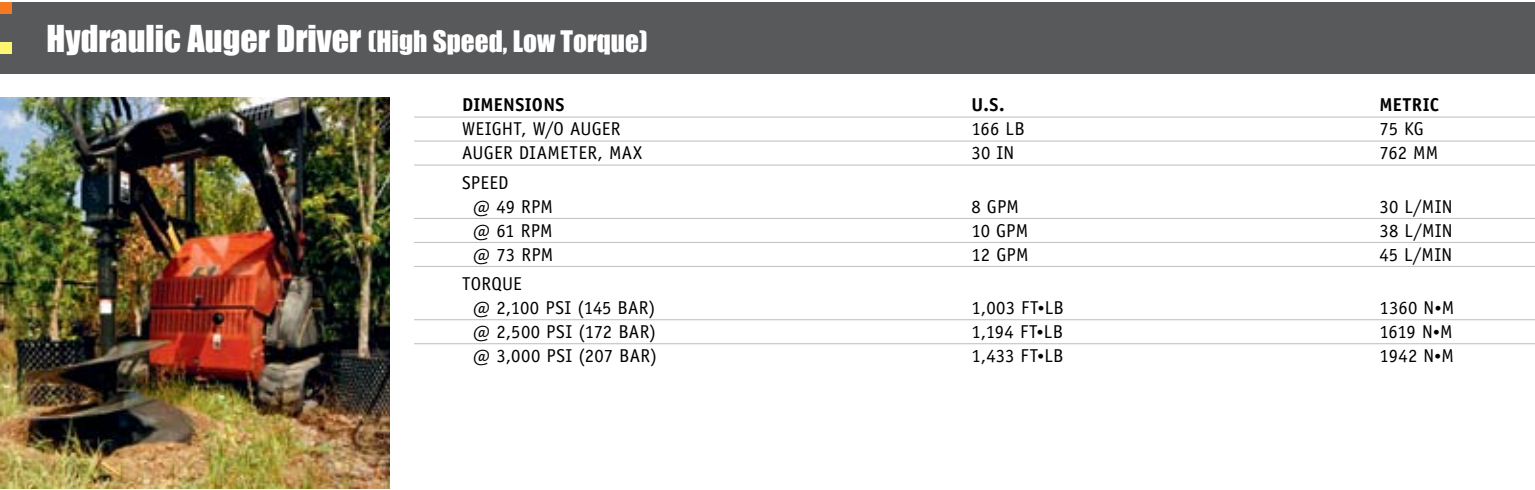


A red hydraulic auger driver machine is shown in operation in a wooded area. The machine is mounted on a black frame with a red body. It has a large black auger bit attached to the front. The machine is positioned on a patch of grass and dirt. In the background, there are trees and a black fence. Overlaid on the right side of the image is a table with three columns: DIMENSIONS, U.S., and METRIC. The table lists various specifications for the machine, including weight, auger diameter, speed, and torque.

Hydraulic Auger Driver (High Speed, Low Torque)

DIMENSIONS	U.S.	METRIC
WEIGHT, W/O AUGER	166 LB	75 KG
AUGER DIAMETER, MAX	30 IN	762 MM
SPEED		
@ 49 RPM	8 GPM	30 L/MIN
@ 61 RPM	10 GPM	38 L/MIN
@ 73 RPM	12 GPM	45 L/MIN
TORQUE		
@ 2,100 PSI (145 BAR)	1,003 FT•LB	1360 N•M
@ 2,500 PSI (172 BAR)	1,194 FT•LB	1619 N•M
@ 3,000 PSI (207 BAR)	1,433 FT•LB	1942 N•M


- **Planetary Auger Driver (High Speed, Low Torque)**

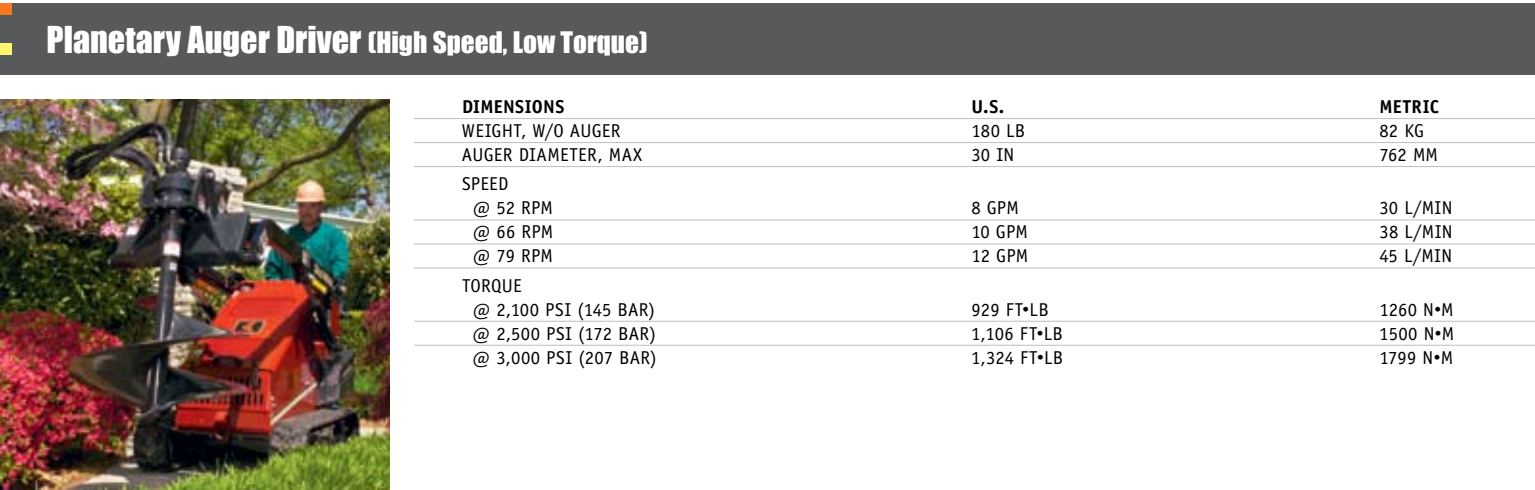

Planetary Auger Driver (High Speed, Low Torque)

DIMENSIONS	U.S.	METRIC
WEIGHT, W/O AUGER	180 LB	82 KG
AUGER DIAMETER, MAX	30 IN	762 MM
SPEED		
@ 52 RPM	8 GPM	30 L/MIN
@ 66 RPM	10 GPM	38 L/MIN
@ 79 RPM	12 GPM	45 L/MIN
TORQUE		
@ 2,100 PSI (145 BAR)	929 FT•LB	1260 N•M
@ 2,500 PSI (172 BAR)	1,106 FT•LB	1500 N•M
@ 3,000 PSI (207 BAR)	1,324 FT•LB	1799 N•M

Planetary Auger Driver (Low Speed, High Torque)

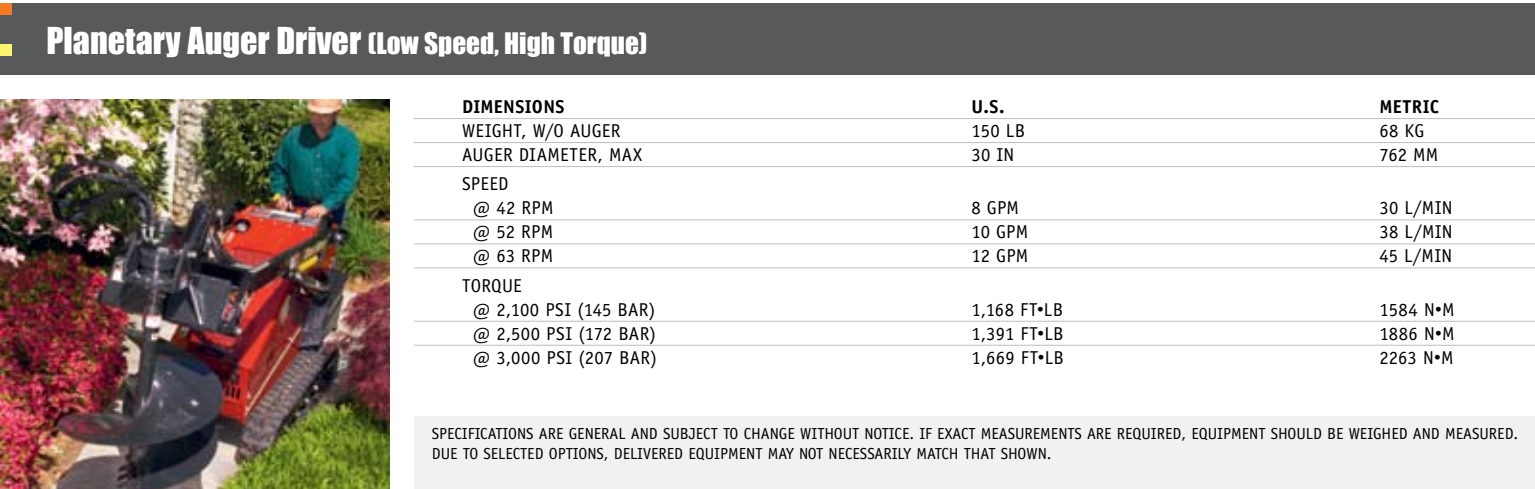

Planetary Auger Driver (Low Speed, High Torque)

DIMENSIONS	U.S.	METRIC
WEIGHT, W/O AUGER	150 LB	68 KG
AUGER DIAMETER, MAX	30 IN	762 MM
SPEED		
@ 42 RPM	8 GPM	30 L/MIN
@ 52 RPM	10 GPM	38 L/MIN
@ 63 RPM	12 GPM	45 L/MIN
TORQUE		
@ 2,100 PSI (145 BAR)	1,168 FT•LB	1584 N•M
@ 2,500 PSI (172 BAR)	1,391 FT•LB	1886 N•M
@ 3,000 PSI (207 BAR)	1,669 FT•LB	2263 N•M


SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.


Planetary Auger Driver (Low Speed, High Torque)

DIMENSIONS	U.S.	METRIC
WEIGHT, W/O AUGER	150 LB	68 KG
AUGER DIAMETER, MAX	30 IN	762 MM
SPEED		
@ 42 RPM	8 GPM	30 L/MIN
@ 52 RPM	10 GPM	38 L/MIN
@ 63 RPM	12 GPM	45 L/MIN
TORQUE		
@ 2,100 PSI (145 BAR)	1,168 FT•LB	1584 N•M
@ 2,500 PSI (172 BAR)	1,391 FT•LB	1886 N•M
@ 3,000 PSI (207 BAR)	1,669 FT•LB	2263 N•M


SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.


48" Backfill Blade

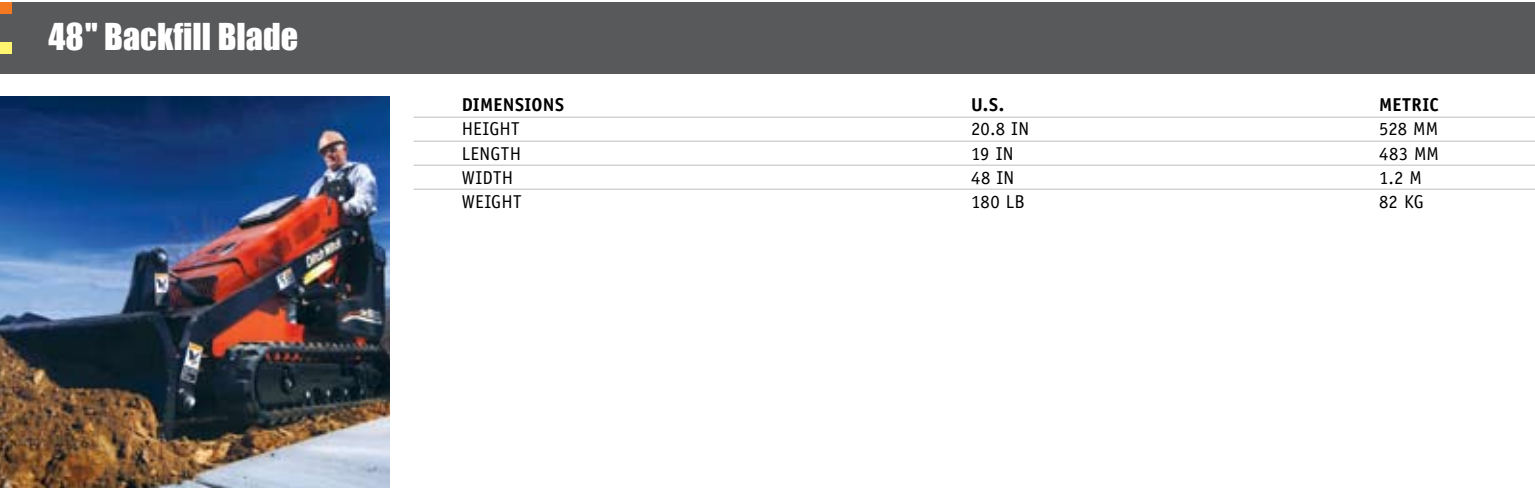


48" Backfill Blade			
	DIMENSIONS		
	HEIGHT	U.S.	METRIC
	LENGTH	20.8 IN	528 MM
	WIDTH	19 IN	483 MM
	WEIGHT	48 IN	1.2 M
		180 LB	82 KG


67" Backfill Blade

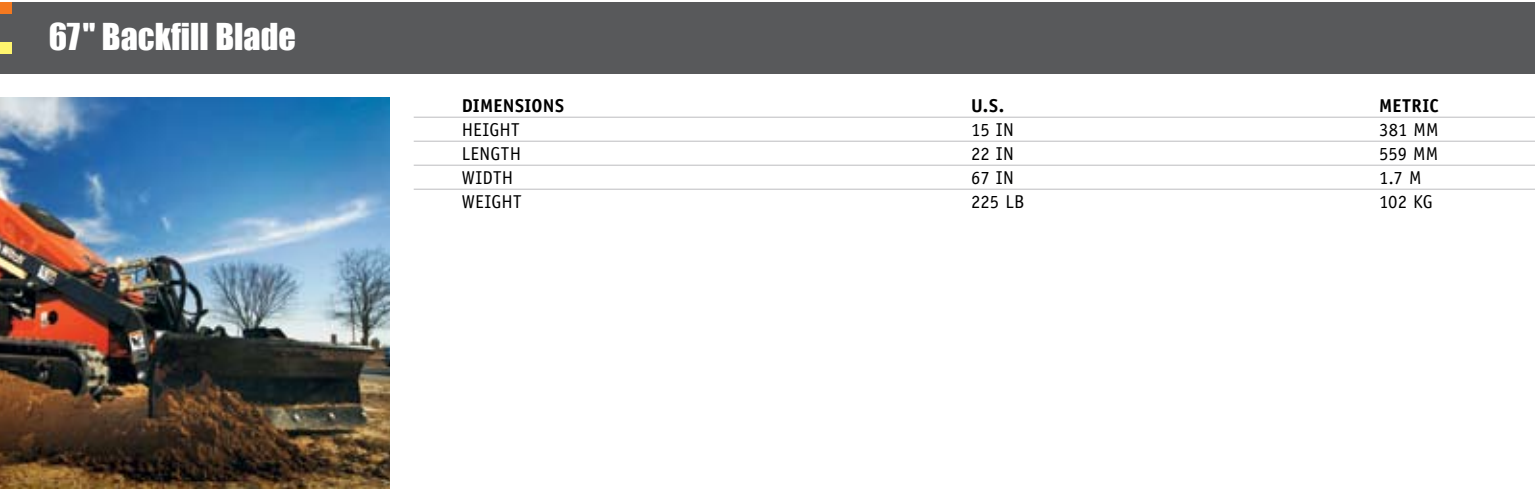


67" Backfill Blade			
	DIMENSIONS	U.S.	METRIC
	HEIGHT	15 IN	381 MM
	LENGTH	22 IN	559 MM
	WIDTH	67 IN	1.7 M
	WEIGHT	225 LB	102 KG


46" 6-Way Backfill Blade

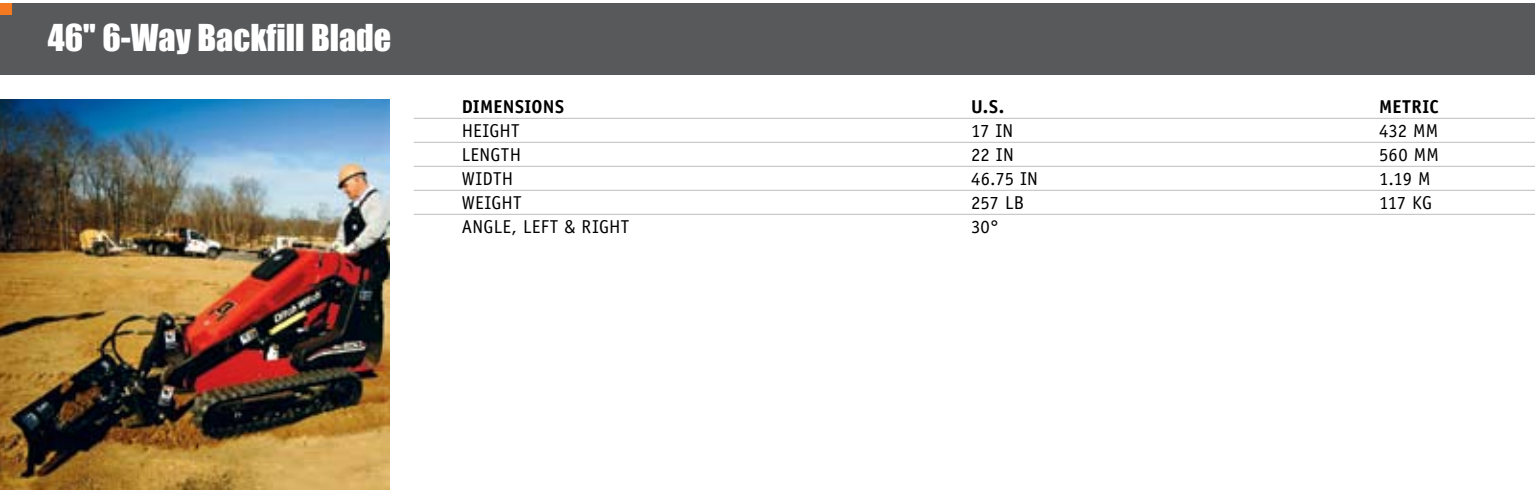

46" 6-Way Backfill Blade			
	DIMENSIONS		
	HEIGHT	U.S.	METRIC
	LENGTH	17 IN	432 MM
	WIDTH	22 IN	560 MM
	WEIGHT	46.75 IN	1.19 M
	ANGLE, LEFT & RIGHT	257 LB	117 KG
		30°	

67" 6-Way Backfill Blade

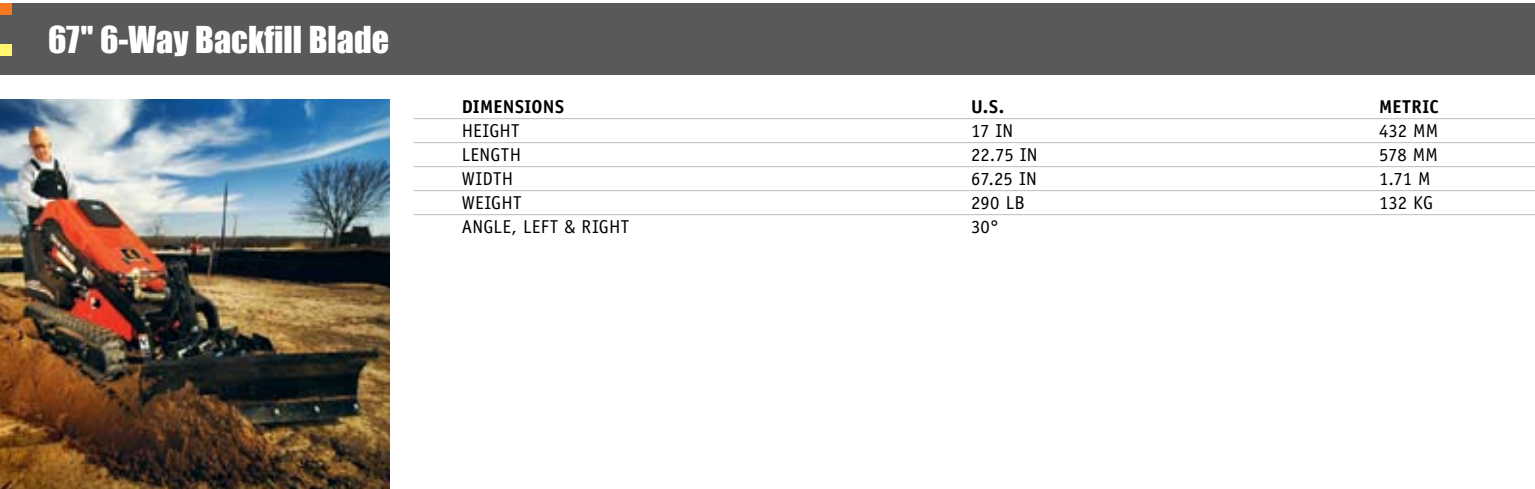

67" 6-Way Backfill Blade			
	DIMENSIONS		
	HEIGHT	17 IN	432 MM
	LENGTH	22.75 IN	578 MM
	WIDTH	67.25 IN	1.71 M
	WEIGHT	290 LB	132 KG
	ANGLE, LEFT & RIGHT	30°	

Backfiller (Center, Left & Narrow)



DIMENSIONS	U.S.	METRIC
HEIGHT	15.5 IN	394 MM
LENGTH		
CENTER	56.5 IN	1.44 M
LEFT	56.5 IN	1.44 M
NARROW	49 IN	1.25 M
WIDTH	17 IN	178 MM
WEIGHT		
CENTER	300 LB	136 KG
LEFT	300 LB	136 KG
NARROW	250 LB	113 KG
AUGER DIAMETER	12 IN	305 MM
AUGER WIDTH		
CENTER	46.5 IN	1.18 M
LEFT	46.5 IN	1.18 M
NARROW	41 IN	1.04 M

Backhoe



DIMENSIONS	U.S.	METRIC
HEIGHT	67 IN	1.7 M
LENGTH	76 IN	1.93 M
WIDTH	45 IN	1.14 M
WEIGHT	712 LB	323 KG

36" Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	17 IN	432 MM
LENGTH	22.4 IN	569 MM
WIDTH	36 IN	914 MM
WEIGHT	149 LB	68 KG
CAPACITY	3.4 FT³	0.09 M³

44" Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	17 IN	432 MM
LENGTH	22.4 IN	569 MM
WIDTH	44 IN	1.1 M
WEIGHT	172 LB	78 KG
CAPACITY	4.2 FT³	0.1 M³

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

52" Bucket



DIMENSIONS	U.S.	U.S.	METRIC	METRIC
	1/4 CUBIC YD	1/3 CUBIC YD	1/4 CUBIC YD	1/3 CUBIC YD
HEIGHT	16.8 IN	16.8 IN	427 MM	427 MM
LENGTH	19.6 IN	27.8 IN	498 MM	706 MM
WIDTH	52 IN	52 IN	1.32 M	1.32 M
WEIGHT	203 LB	243 LB	92 KG	110 KG
CAPACITY	6.75 FT³	9 FT³	0.19 M³	0.25 M³

High Lift Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	14.5 IN	368 MM
LENGTH	32 IN	673 MM
WIDTH	42 IN	1.07 M
WEIGHT	160 LB	72.6 KG
CAPACITY	4 FT³	0.11 M³

Light Materials Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	27.5 IN	699 MM
LENGTH	33 IN	838 MM
WIDTH	44.5 IN	1.13 M
WEIGHT	285 LB	129 KG

44" 4-in-1 Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	19.5 IN	495 MM
LENGTH	27.5 IN	700 MM
WIDTH	44 IN	1.12 M
WEIGHT	275 LB	125 KG
CAPACITY	5 FT³	0.14 M³

52" 4-in-1 Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	19.5 IN	495 MM
LENGTH	27.5 IN	700 MM
WIDTH	52 IN	1.32 M
WEIGHT	312 LB	142 KG
CAPACITY	7 FT³	0.2 M³

Carry-All Leveler



DIMENSIONS	U.S.	METRIC
HEIGHT	16 IN	406 MM
LENGTH	36 IN	914 MM
WIDTH	49 IN	1.24 M
WEIGHT	140 LB	64 KG

Cement Bowl



DIMENSIONS	U.S.	METRIC
HEIGHT	28.125 IN	714 MM
DIAMETER	23 IN	584 MM
WEIGHT	73 LB	33 KG
MIXING CAPACITY, MAX	3.1 FT³	0.1 M³

Grading Rake



DIMENSIONS	U.S.	METRIC
HEIGHT	19 IN	483 MM
LENGTH	36 IN	914 MM
WIDTH	42 IN	1.07 M
WEIGHT	250 LB	113 KG
SCARIFIER LENGTH	12 IN	305 MM

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

42" Grapple Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	25.5 IN	650 MM
LENGTH	31.25 IN	795 MM
WIDTH	42 IN	1.07 M
WEIGHT	270 LB	123 KG
GRAPPLE OPENING	29 IN	737 MM

54" Grapple Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	25.5 IN	650 MM
LENGTH	31.25 IN	795 MM
WIDTH	54 IN	1.37 M
WEIGHT	295 LB	134 KG
GRAPPLE OPENING	29 IN	737 MM

Harley® Rake (Hydraulic or Manual Frame Swing)



DIMENSIONS	U.S.	METRIC
HEIGHT	24 IN	610 MM
LENGTH	51 IN	1.3 M
WIDTH	58 IN	1.47 M
WEIGHT	510 LB	231 KG
ROLLER WIDTH	48 IN	1.22 M
HYDRAULIC FLOW, MAX	8 GPM	30 L/MIN

Jackhammer



DIMENSIONS	U.S.	METRIC
LENGTH	40.5 IN	1.03 MM
WEIGHT	209 LB	95 KG
TOOL DIAMETER	1.76 IN	45 MM
STRIKES PER MINUTE	1,200	
ENERGY PER STROKE	177 FT•LB	240 N•M
HYDRAULIC FLOW, MAX	9 GPM	35 L/MIN
WORKING PRESSURE, MAX	1,740 PSI	120 BAR

Multi-Task Tool



DIMENSIONS	U.S.	METRIC
HEIGHT	11.5 IN	292 MM
LENGTH	40 IN	1.02 M
WIDTH	24 IN	610 MM
WEIGHT	120 LB	55 KG
LIFTING CAPACITY, MAX	900 LB	408 KG
RIPPING DEPTH	10 IN	254 MM

Pallet Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	30 IN	762 MM
FORK LENGTH	36 IN	914 MM
SPREAD, MIN	6.5 IN	165 MM
SPREAD, MAX	34 IN	864 MM
WEIGHT	227 LB	103 KG

Plate Compactor



DIMENSIONS	U.S.	METRIC
HEIGHT	20 IN	508 MM
LENGTH	18 IN	457 MM
WIDTH	41 IN	1.04 M
WEIGHT	519 LB	235 KG
VERTICAL FORCE	5,500 LBF	24.5 KN
FREQUENCY	1,900 VPM	
HYDRAULIC FLOW	8 GPM	30 L/MIN

Rotary Broom



DIMENSIONS	U.S.	METRIC
HEIGHT	28 IN	711 MM
LENGTH	45 IN	1.1 M
WIDTH	50.5 IN	1.3 M
WEIGHT	420 LB	190 KG
SPEED	180 RPM @ 12 GPM	180 RPM @ 45 L/MIN

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

Rotodarian® Soil Cultivator



DIMENSIONS	U.S.	METRIC
HEIGHT	22 IN	559 MM
LENGTH	48 IN	1.22 M
WIDTH	45.9 IN	1.17 M
WEIGHT, W/O SEED BOX	430 LB	195 KG

Roto Witch® Drilling Attachment



DIMENSIONS	U.S.	METRIC
HEIGHT	10.1 IN	257 MM
LENGTH	21.5 IN	546 MM
WIDTH	36.5 IN	927 MM
WEIGHT	136 LB	62 KG
BORE/BACKREAM HOLE DIAMETER	1.75-12 IN	45-300 MM
SPEED		
NO LOAD	142 RPM @ 13.5 GPM	142 RPM @ 51 L/MIN
@ 2,000 PSI (140 BAR)	130 RPM @ 13.5 GPM	130 RPM @ 51 L/MIN
TORQUE	560 FT•LB @ 2,500 PSI	759 N•M @ 140 BAR

Saw



DIMENSIONS	U.S.	METRIC
HEIGHT	39.5 IN	1 M
LENGTH	51 IN	1.3 M
WIDTH	34 IN	864 MM
WEIGHT	600 LB	272 KG
TRENCH DEPTH	13 IN	330 MM
TRENCH WIDTH	4 IN	102 MM

Sod Layer



DIMENSIONS	U.S.	METRIC
HEIGHT, ROLL GUIDES UP	13.19 IN	335 MM
HEIGHT, ROLL GUIDES DOWN	19.62 IN	498 MM
LENGTH	24.5 IN	622 MM
WIDTH, ARMS OPEN	60 IN	1.52 M
WIDTH, ARMS CLOSED	48 IN	1.22 M
WEIGHT	195 LB	88.5 KG
SOD OPENING, MIN	12.5 IN	318 MM
SOD ROLL SIZE, MIN	21 IN	533 MM
SOD ROLL SIZE, MAX	43.5 IN	1.11 M
WEIGHTED DRUM	OPTIONAL	

Stump Grinder



DIMENSIONS	U.S.	METRIC
HEIGHT	17 IN	432 MM
LENGTH	28 IN	711 MM
WIDTH	24 IN	610 MM
WEIGHT	185 LB	83.9 KG
STUMP HEIGHT, MAX	24 IN	610 MM
CUTTING DEPTH, MAX	12 IN	305 MM
WHEEL SPEED @ 13 GPM (49 L/MIN)	981 RPM	
NUMBER OF TEETH	16	
HYDRAULIC FLOW, MAX	13 GPM	49 L/MIN

Tiller



DIMENSIONS	U.S.	METRIC
HEIGHT	18 IN	457 MM
LENGTH	28 IN	711 MM
WIDTH	51 IN	1.3 M
WEIGHT	320 LB	145 KG
TILLING DEPTH	2.5-5 IN	64-127 MM
TILLING WIDTH, MAX	40 IN	1.02 M
TILLING SPEED @ 12 GPM (45 L/MIN)	180 RPM	180 RPM
NUMBER OF TINES	36	

Tree Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	12.5 IN	318 MM
LENGTH	47 IN	1.19 M
WIDTH	25 IN	635 MM
WEIGHT	145 LB	66 KG
FORK HEIGHT	3 IN	76 MM
FORK LENGTH	43 IN	1.09 M
FORK WIDTH	3 IN	76 MM
WIDTH BETWEEN FORKS, MIN	4 IN	102 MM
MAXIMUM LOAD	220 LB	100 KG
CROSS-SECTION, TRIANGULAR MOVEMENT RANGE	LEFT – 38°, RIGHT – 0°	

Tree Shear



DIMENSIONS	U.S.	METRIC
HEIGHT	42 IN	1.07 M
LENGTH	26.6 IN	676 MM
WIDTH	36.7 IN	932 MM
WEIGHT	393 LB	178 KG
SHEAR FORCE, MAX	41,610 LBF	185 KN
SHEAR CAPACITY, MAX	7 IN	178 MM

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

24" Trencher



DIMENSIONS	U.S.	METRIC
TRENCH DEPTH, MAX	24 IN	610 MM
TRENCH WIDTH, MAX	6 IN	152 MM
WEIGHT, W/ 2-FT (610 MM) BOOM	260 LB	118 KG

30" Trencher



DIMENSIONS	U.S.	METRIC
TRENCH DEPTH, MAX	30 IN	762 MM
TRENCH WIDTH, MAX	6 IN	152 MM
WEIGHT, W/ 2-FT (610 MM) BOOM	375 LB	170 KG
DIGGING CHAIN SPEED		
STANDARD	317 FPM	97 M/MIN
LOW SPEED/HIGH TORQUE	200 FPM	61 M/MIN

Trencher (Offset Wide)



DIMENSIONS	U.S.	METRIC
TRENCH DEPTH, MAX	55.5 IN	1.41 M
TRENCH WIDTH, MAX	12 IN	305 MM
WEIGHT, W/ 2-FT (610 MM) BOOM	550 LB	250 KG
DIGGING CHAIN SPEED		
STANDARD	211 FPM	64.20 M/MIN
HIGH SPEED/LOW TORQUE	256 FPM	78 M/MIN

Vibratory Plow



DIMENSIONS	U.S.	METRIC
HEIGHT	18.8 IN	478 MM
LENGTH	30.5 IN	775 MM
WIDTH	24.3 IN	617 MM
WEIGHT, W/O PLOW BLADE	375 LB	170 KG
COVER DEPTH, MAX	13.5 IN	343 MM
PLOW-IN DEPTH, NOMINAL	6-12 IN	152-305 MM
BULLET DIAMETER, MAX	3 IN	76 MM
FEED BLADE, INSIDE DIAMETER	1 IN	25 MM
PLOW VIBRATOR	12 GPM	45 L/MIN

Planetary Auger Driver (Low Speed, High Torque)



DIMENSIONS	U.S.	METRIC
WEIGHT	369 LB	167.4 KG
AUGER DIAMETER, MAX	36 IN	914 MM
SPEED		
@ 49 RPM	15 GPM	57 L/MIN
@ 58 RPM	18 GPM	68 L/MIN
@ 65 RPM	20 GPM	76 L/MIN
@ 71 RPM	22 GPM	83 L/MIN
@ 78 RPM	24 GPM	91 L/MIN
@ 84 RPM	26 GPM	98 L/MIN
@ 90 RPM	28 GPM	106 L/MIN
@ 97 RPM	30 GPM	114 L/MIN
TORQUE		
@ 2,000 PSI (138 BAR)	1,856 FT•LB	2516 N•M
@ 2,500 PSI (172 BAR)	2,328 FT•LB	3156 N•M
@ 3,000 PSI (207 BAR)	2,769 FT•LB	3754 N•M

6-Way Backfill Blade



DIMENSIONS	U.S.	METRIC
LENGTH	37 IN	940 MM
HEIGHT	30 IN	759 MM
WIDTH	84 IN	2.13 M
WEIGHT	1,435 LB	619 KG
WIDTH, @ 30° ANGLE	73.13 IN	1.86 M
ANGLE, LEFT & RIGHT	30°	

Breaker (s30)



DIMENSIONS	U.S.	METRIC
LENGTH	51 IN	1.3 M
WEIGHT	303 LB	137 KG
TOOL DIAMETER	2.1 IN	53 MM
STRIKES PER MINUTE	650-1,150	
ENERGY PER STROKE, MAX	450 FT•LB	610 N•M
HYDRAULIC FLOW	8-11 GPM	30-42 L/MIN
HYDRAULIC PRESSURE	1,562 PSI	108 BAR

Breaker (s40)



DIMENSIONS	U.S.	METRIC
LENGTH	57 IN	1.45 M
WEIGHT	505 LB	229 KG
TOOL DIAMETER	2.6 IN	66 MM
STRIKES PER MINUTE	450-1,250	
ENERGY PER STROKE, MAX	550 FT•LB	746 N•M
HYDRAULIC FLOW	8-16 GPM	30-61 L/MIN
HYDRAULIC PRESSURE	1,633 PSI	113 BAR

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	20.6 IN	523.2 MM
LENGTH	39 IN	991 MM
WIDTH	72.2 IN	1.83 M
WEIGHT	533 LB	242.3 KG
CAPACITY	19.2 FT³	0.54 M³

Grapple Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	28 IN	711 MM
LENGTH	28 IN	711 MM
WIDTH	73 IN	1.85 M
WEIGHT	795 LB	361 KG
GRAPPLE OPENING	37 IN	940 MM
CLAMPING FORCE	1,250 LB	5560 N
NUMBER OF TEETH	4	

Light Materials Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	35 IN	889 MM
LENGTH	41 IN	1.04 M
WIDTH	84 IN	2.13 M
WEIGHT	745 LB	336 KG
CAPACITY	43.8 FT³	1.25 M³
ROLLBACK ANGLE	20°	
CUTTER EDGE THICKNESS	0.75 IN	19 MM

Ripper Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	21 IN	533 MM
LENGTH	42 IN	1.07 M
WIDTH	72 IN	1.83 M
WEIGHT	780 LB	354 KG

Rock Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	21.77 IN	553 MM
LENGTH	49.8 IN	1.27 M
WIDTH	74.35 IN	1.89 M
WEIGHT	742 LB	337 KG
TINE DIAMETER	1.13 IN	29 MM
TINE SPACING	2 IN	51 MM

4-in-1 Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	26.8 IN	71 MM
LENGTH	39.11 IN	993 MM
WIDTH	73.5 IN	1.87 M
WEIGHT	740 LB	336 KG
CAPACITY	17.1 FT³	0.48 M³
GRAPPLE OPENING	32 IN	812.8 MM

Carry-All Leveler



DIMENSIONS	U.S.	METRIC
HEIGHT	22.94 IN	583 MM
LENGTH	46.32 IN	1.18 M
WIDTH	78.75 IN	2 M
WEIGHT	515 LB	234 KG

Cement Bucket



DIMENSIONS	U.S.	METRIC
HEIGHT	27 IN	686 MM
LENGTH	73.5 IN	1.87 M
WIDTH	22.5 IN	572 MM
WEIGHT	380 LB	173 KG
CAPACITY	13.5 FT³	0.38 M³
HYDRAULIC FLOW	12 GPM	45 L/MIN
HYDRAULIC PRESSURE	2,000 PSI	136 BAR
SPEED	237 RPM	
DISCHARGE RATE (50 SEC)	13.5 FT³	0.38 M³

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

Grapple Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	26.4 IN	671 MM
LENGTH	35.9 IN	912 MM
WIDTH	72 IN	1.83 M
WEIGHT	794 LB	361 KG
GRAPPLE OPENING	42 IN	1.07 M
CLAMPING FORCE	1,250 LB	5560 N
TINE SPACING	6 IN	152.4 MM

Grapple Handler



DIMENSIONS	U.S.	METRIC
HEIGHT	15 IN	381 MM
LENGTH	24 IN	610 MM
WIDTH	18 IN	457 MM
WEIGHT	240 LB	109 KG

Harley® Rake



DIMENSIONS	U.S.	METRIC
HEIGHT	37.5 IN	953 MM
LENGTH	60 IN	1.52 M
WIDTH	93.5 IN	2.37 M
WEIGHT	1,050 LB	476 KG
ROLLER LENGTH	84 IN	2.13 M
ROLLER ANGLE, BOTH DIRECTIONS	20°	
TIRES	16.5 X 6.5 - 8 IN	419 X 165 - 203 MM
TIRE PRESSURE	60 PSI	4.14 BAR
OIL CAPACITY, CHAIN CASE	0.1875 GAL	0.71 L

Hydraulic Thumb



DIMENSIONS	U.S.	METRIC
HEIGHT	7 IN	178 MM
LENGTH	37 IN	940 MM
WIDTH	12 IN	305 MM
WEIGHT	85 LB	39 KG

Jackhammer (S60)



DIMENSIONS	U.S.	METRIC
LENGTH	63 IN	1.6 M
WEIGHT	726 LB	329 KG
TOOL DIAMETER	3 IN	76 MM
STRIKES PER MINUTE	550-1,100	
ENERGY PER STROKE, MAX	850 FT•LB	1153 N•M
HYDRAULIC FLOW	14-26 GPM	53-98 L/MIN
HYDRAULIC PRESSURE	1,781 PSI	123 BAR

Pallet Forks



DIMENSIONS	U.S.	METRIC
HEIGHT	38.75 IN	984 MM
WIDTH, W/O STEP	45.88 IN	1.17 M
WIDTH, W/ STEP	50.75 IN	1.29 M
ADJUSTABLE TINE SPACING, MIN (CENTER)	9 IN	229 MM
ADJUSTABLE TINE SPACING, MAX (OUTSIDE)	44 IN	1.12 M

Post Driver



DIMENSIONS	U.S.	METRIC
HEIGHT	64 IN	1.63 M
LENGTH	48 IN	1.21 M
WIDTH	24 IN	610 MM
WEIGHT	860 LB	390 KG
HAMMER WEIGHT	275 LB	125 KG
LENGTH OF STROKE	36 IN	914 MM
STOKES PER MINUTE	50	
HYDRAULIC REQUIREMENTS, MIN	12 GPM, 2,000 PSI	45 L/MIN, 136 BAR
POSTS, WOOD & STEEL	3-8 IN	80-200 MM
T-POST & H-BEAM ADAPTER	OPTIONAL	

Quick Latch



DIMENSIONS	U.S.	METRIC
HEIGHT	9.24 IN	235 MM
LENGTH	17 IN	433 MM
WIDTH	9.15 IN	232 MM
WEIGHT	80 LB	36 KG
BUCKET MOUNT WIDTH	5.63 IN	143 MM
BUCKET MOUNT PIN CENTER DISTANCE	7.81 IN	198 MM
PIN DIAMETER	1.38 IN	35 MM
RELEASE MECHANISM	MANUAL	
POSITIVE LOCK	PIN W/KEEPER	
LATCH ENGAGEMENT	AUTOMATIC, SPRING LOADED	

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

Rotary Broom



DIMENSIONS	U.S.	METRIC
HEIGHT	36 IN	914 MM
LENGTH @ 0° ARTICULATION, MAX	71 IN	1.80 M
SWEEPING WIDTH @ 0° ARTICULATION	72 IN	1.83 M
SWEEPING WIDTH @ FULL ARTICULATION	64 IN	1.63 M
WEIGHT	915 LB	415 KG
HYDRAULIC FLOW	12-25 GPM	45-95 L/MIN

SK Adapter Plate



DIMENSIONS	U.S.	METRIC
HEIGHT	10.9 IN	277 MM
LENGTH	11.1 IN	282 MM
WIDTH	23 IN	584 MM
WEIGHT	75 LB	34 KG

Tilt Attachment



DIMENSIONS	U.S.	METRIC
HEIGHT	19 IN	483 MM
LENGTH	7 IN	178 MM
WIDTH	48 IN	1.22 M
WEIGHT	415 LB	188 KG

Tree Shear



DIMENSIONS	U.S.	METRIC
HEIGHT	60 IN	1.52 M
WIDTH	74.25 IN	1.89 M
WEIGHT	1,400 LB	635 KG
ROLLBACK ANGLE	20°	
BLADE THICKNESS	0.75 IN	19 MM
TREE CAPACITY	12 IN	305 MM

Tree Spade



DIMENSIONS	U.S.	METRIC
HEIGHT, BLADES UP (OPEN)	64.5 IN	1.64 M
FRAME HEIGHT	22.5 IN	572 MM
LENGTH, GATE OPEN	75 IN	1.91 M
TRANSPORT LENGTH, GATE CLOSED	68 IN	1.73 M
TRANSPORT WIDTH, GATE CLOSED	66 IN	1.68 M
WEIGHT	1,500 LB	680 KG
DIGGING DEPTH	31 IN	787 MM
CUTTING ANGLE	25°	
GATE OPENING, MAX	40 IN	1.02 M
LEG ADJUSTMENT, MAX	10.5 IN	267 MM
NUMBER OF BLADES	3	
TREE BALL DIAMETER	24-36 IN	610-914 MM
TREE DIAMETER	2-3.5 IN	51-89 MM
BALL WEIGHT	250-1,000 LB	113-454 KG
HYDRAULIC FLOW	10 GPM	38 L/MIN

Trencher



DIMENSIONS	U.S.	METRIC
HEIGHT	36 IN	914 MM
LENGTH, W/ 4-FT (1.21 M) BOOM	98 IN	2.49 M
WIDTH	62 IN	1.58 M
WEIGHT, W/ 4-FT (1.21 M) BOOM	1,140 LB	517 KG
TRENCH DEPTH, MAX	52 IN	1.32 M
RECOMMENDED TRENCH DEPTH	48 IN	1.22 M
TRENCH WIDTH, MIN TO MAX	6-8 IN	150-200 MM
RECOMMENDED BOOM ANGLE	55°	
SPOILS DISCHARGE REACH	23 IN	584 MM
DIGGING CHAIN SPEED	457 FPM	139.14 M/MIN

Vibratory Plow



DIMENSIONS	U.S.	METRIC
HEIGHT	18.8 IN	478 MM
LENGTH	30.5 IN	775 MM
WIDTH	24.3 IN	617 MM
WEIGHT, W/O PLOW BLADE	880 LB	399 KG
WIDTH BETWEEN PLATES	2.1 IN	53 MM
DISTANCE BETWEEN PINS	7 IN	178 MM
PIN DIAMETER	1.8 IN	46 MM
HEIGHT FROM SHAKER BOTTOM TO PIN HOLE CENTER	2 IN	51 MM
COVER DEPTH, MAX	13.5 IN	343 MM
PLOW-IN-DEPTH, NOMINAL	6-12 IN	152-305 M
BULLET DIAMETER, MAX	3 IN	76 MM
FEED BLADE, INSIDE DIAMETER	1 IN	25 MM
PLOW VIBRATOR	12 GPM	45 L/MIN

SPECIFICATIONS ARE GENERAL AND SUBJECT TO CHANGE WITHOUT NOTICE. IF EXACT MEASUREMENTS ARE REQUIRED, EQUIPMENT SHOULD BE WEIGHED AND MEASURED. DUE TO SELECTED OPTIONS, DELIVERED EQUIPMENT MAY NOT NECESSARILY MATCH THAT SHOWN.

CHOOSING THE RIGHT ATTACHMENT

Matching the attachment to the right compact utility machine is important to the success of your landscaping, construction, utility, or demolition task—and also important to keeping your machine and the attachment operating at peak performance. For example, the hydraulic needs of the attachments must be compatible with the hydraulic capabilities of the machine. (Refer to your operator’s manuals to determine the proper direct-performance correlation between the machine and the attachment.) And whether you’re buying or renting, you can always depend on a knowledgeable, highly-trained Ditch Witch® equipment dealer to help you make the right decisions.





THE CHARLES MACHINE WORKS, INC. DITCH WITCH WORLDWIDE HEADQUARTERS PERRY, OK 73077-0066 U.S.A.

TOLL FREE 800 654 6481 PHONE 580 336 4402 FAX 580 336 3458 INTERNATIONAL FAX 580 572 3561

ASK ABOUT THE DITCH WITCH PLATINUM CARD AND DITCH WITCH FINANCIAL SERVICES

TO FIND THE DEALER NEAREST YOU, VISIT DITCHWITCH.COM

GROUNDBREAKING™ EQUIPMENT FROM THE COMPANY THAT LAUNCHED THE INDUSTRY

COMPACT UTILITY | TRENCHERS | HDD | ELECTRONICS

CERTIFIED QUALITY
MANAGEMENT SYSTEM
ISO 9001:2000

LFCMWL2035-0207-2